

URBAN MARKET

COLLECTION













Cayuga understands product merchandising today is about fresh presentation, versatility and innovation – often in smaller retail spaces. Retailer needs can be very specific, however budgets don't always allow for a fully custom case. This is where the Urban Market Collection comes in: customizable cases designed on a standard platform.

The Urban Market Collection reflects the latest styles and trends in the industry – helping you keep your look and brand fresh. Designed and manufactured at our own North American facility, the entire collection is fully customizable with a variety of finishes, colours, materials and other options.

And when you work with Cayuga Displays, you can always be confident we'll help you to select the right product and options, so that you have the food presentation that is certain to elevate your customers' experience and enhance your brand – beautifully.

"Longos is pleased to support Cayuga Displays."
Your team's quick service/
turnaround for projects has helped us with our millwork for bakery and floral in past projects. More recently your team has come up with some cost effective refrigeration solutions for our bakery and produce."

Paul Collette, Longo's Support Center Project Manager Real Estate and Construction

THINGS TO CONSIDER

Showcases are designed to display your refrigerated products at 38-41°F (4-5°C). Showcases are designed to perform correctly when placed in environmental conditions of maximum 75°F (23°C) and 55% relative humidity.

When selecting a showcase and placing it in your store environment, you need to consider the following:

Consider nearby doorways

Consider nearby windows

Consider nearby vent sources and fans

Ensure your display is level and plumb



A location near a doorway will affect the airflow and holding temperature of open and closed showcases.



Direct sunlight will affect the holding temperature of open or closed showcases.



HVAC ceiling vents and ceiling fans will affect the airflow of open showcases and could create condensation on the glass of closed showcases.



Ensure your showcase is plumb and level to allow for proper drainage of condensation water.



Maintenance

Your showcase will work at its peak performance with regular maintenance. An owners' manual with maintenance instructions is included or you can also check out our online maintenance video.



Watch our maintenance video at cayugadisplays.com/maintenance



Leave appropriate space behind displays



A 6" space is required behind any showcase that is against a wall or has a rear obstruction.

Clean your display



to regularly wipe away dust. Too much dust will not allow the refrigeration to work properly and could result in damage.

No Warm **Product in Case**



Use the included brush Refrigerated displays are designed to KEEP COLD PRODUCT COLD - they are not designed to bring warm product down to a cold temperature. For food safety it is always imperative that warm product be properly chilled (using a blast chiller or cold room) prior to storing in the refrigerated display case.


Noise



Self-contained cases have compressor motors and fans and these will make noise, just as your household refrigerator makes noise. Keeping your showcase serviced and clean will help keep the noise level under control.

REFRIGERATED



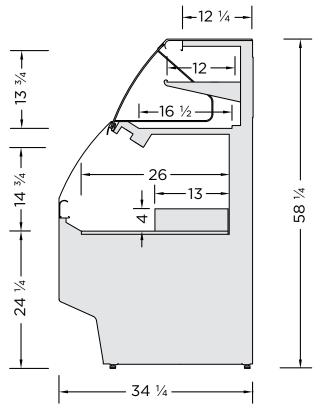

| MODEL | LENGTH | |
|--------|---------|--|
| SSS-38 | 40 1/4" | |
| SSS-48 | 49 1/8" | |
| SSS-57 | 59 ¾" | |
| SSS-76 | 78 ½" | |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- · Sliding baffle between the service/selfservice areas to create a dry service display
- 12" adjustable tempered glass shelf in the top service display area
- Tilt-out front glass on the top display area for easy cleaning
- Removable 4" riser step in the self-service display area (shelf options available)
- Removable base deck panels for easy cleaning and service
- LED lighting attached to the top ledge of the service and the self-service display
- Thermal rear sliding doors on the service display
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:





Restaurants



💂 Deli







REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SSS-38 | 115 | 11.6 | 5-15P |
| SSS-48 | 115 | 11.9 | 5-15P |
| SSS-57 | 115/230 | 8.8 | L14-20P |
| SSS-76 | 115/230 | 9.8 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- 12" tempered glass shelf in the service display
- Removable 4"H riser step in the selfservice display area
- LED lighting attached at the top of the service and the self-service display
- Thermal glass rear sliding doors on the service display
- Tilt-out curved front glass on the service display
- Sliding baffle for top ambient service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|--|--|
| Rear loading doors for the self-service display area | |
| Heavy duty lockable casters | |
| Add 1 shelf level to the bottom self- service display area (instead of rsier step inlay) | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Wire security grill panel for service display area | |
| Price tag molding strip for tempered glass shelves | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas

SLIM-LINE CURVED GLASS COMBINATION SERVICE/SELF-SERVICE DISPLAY

₽ REFRIGERATED



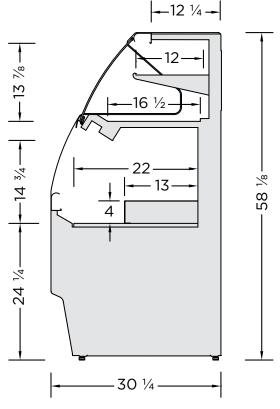

| MODEL | LENGTH | |
|--------|---------|--|
| SLS-38 | 40 1/4" | |
| SLS-48 | 49 1/8" | |
| SLS-57 | 59 ¾" | |
| SLS-76 | 78 ½" | |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- · Sliding baffle between the service/selfservice areas to create a dry service display
- 12" adjustable tempered glass shelf in the top service display area
- Tilt-out front glass on the top display area for easy cleaning
- Removable 4" riser step in the self-service display area (shelf options available)
- Removable base deck panels for easy cleaning and service
- LED lighting attached to the top ledge of the service and the self-service display
- · Thermal rear sliding doors on the service display
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Bakery

Restaurants



Deli Deli



Cafe



SLIM-LINE CURVED GLASS COMBINATION SERVICE/ SELF-SERVICE DISPLAY

= REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SLS-38 | 115 | 11.6 | 5-15P |
| SLS-48 | 115 | 11.9 | 5-15P |
| SLS-57 | 115/230 | 8.8 | L14-20P |
| SLS-76 | 115/230 | 9.5 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- 12" tempered glass shelf in the service display
- Removable 4"H riser step in the selfservice display area
- LED lighting attached at the top of the service and the self-service display
- Thermal glass rear sliding doors on the service display
- Tilt-out curved front glass on the service display
- Sliding baffle for top ambient service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to Veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |


| END PANELS | |
|--|--|
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |

| MISCELLANEOUS | |
|--|--|
| Heavy duty lockable casters | |
| Rear loading doors for the self-servide display area | |
| Price tag mold strip for tempered glass shelves | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Wire security grill panel for service display area | |
| Add 1 shelf level to the bottom self- service display area (instead of riser step inlay) | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas

₽ REFRIGERATED



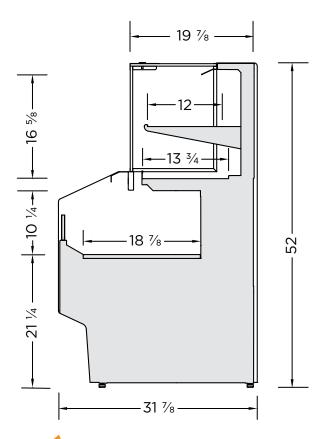

| MODEL | LENGTH |
|--------------|---------|
| ST-SSS-38-52 | 40 1/4" |
| ST-SSS-48-52 | 49 1/8" |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- Sliding baffle between the service/selfservice areas to create a dry service display
- 12" adjustable tempered glass shelf with integrated LED lighting in the top service display area
- · Unique all square glass top display area
- Removable base deck panels for easy cleaning and service
- LED lighting attached to the top ledge of the service and self-service display
- Thermal rear sliding doors on top service display
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:



Bakery



Cafe





| ELECTRICAL SPECIFICATIONS | | | | |
|---------------------------|------------------|------|-------|--|
| MODEL | MODEL VOLTS AMPS | | | |
| ST-SSS-38-52 | 115 | 11.6 | 5-15P | |
| ST-SSS-48-52 | 115 | 11.9 | 5-15P | |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- 12" tempered glass shelf in the service display
- LED lighting attached at the top of the service and the self-service display areas
- Thermal glass rear sliding doors on the service display
- Sliding baffle for top ambient service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |


| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |

| MISCELLANEOUS | |
|--|--|
| Rear loading doors for the self-service display area | |
| Price tag mold strip for tempered glass shelves | |
| Eliminate 1 shelf level | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Heavy duty lockable casters | |
| Locks for rear sliding doors | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% Humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas.





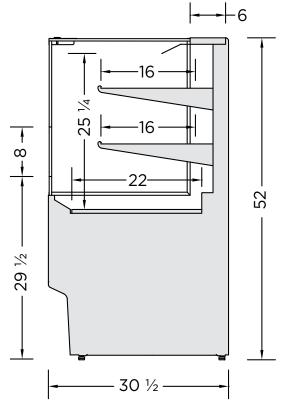

| MODEL | LENGTH |
|-----------|---------|
| SG-SSS-38 | 40 1/4" |
| SG-SSS-48 | 49 %" |
| SG-SSS-57 | 59 ¾" |
| SG-SSS-76 | 78 ½" |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134a self contained refrigeration
- Two 16" adjustable tempered glass shelves with integrated LED lighting
- · Opening in the front glass to provide a self-service base display
- Removable base deck panels for easy cleaning and service
- LED lighting attached to the top ledge of the display
- Thermal rear sliding doors
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Restaurants



Butcher shops



Cafe



REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SG-SSS-38 | 115 | 11.8 | 5-15P |
| SG-SSS-48 | 115 | 12 | 5-15P |
| SG-SSS-57 | 115/230 | 8.9 | L14-20P |
| SG-SSS-76 | 115/230 | 9.8 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- Two 16" adjustable tempered glass shelves with integrated LED lighting in the service display
- LED lighting attached at the top of the display
- Thermal glass rear sliding doors on the service display
- Fixed tempered front glass with an opening for self-service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|--|--|
| Heavy duty lockable casters | |
| Rear fold-down work shelf | |
| Mirrored rear sliding doors | |
| Wire security grill panel for service display area | |
| Price tag mold strip for tempered glass shelves | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- · Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas

CURVED GLASS SERVICE DISPLAY

₽ REFRIGERATED



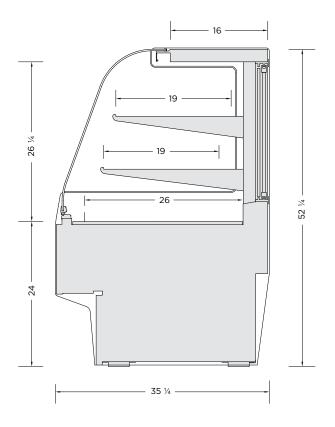

| MODEL | LENGTH |
|---------|--------|
| RH3M-38 | 40 ¼" |
| RH3M-48 | 49 %" |
| RH3M-57 | 59 ¾" |
| RH3M-76 | 78 ½" |
| RH3M-96 | 97 %" |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- 15" & 17" adjustable tempered glass shelves with integrated LED lighting
- Removable base deck panels for easy cleaning and service
- · Tilt-out front glass for easy cleaning
- Air circulating defogging system to keep the front glass clear of condensation
- LED lighting attached to the top ledge of the display
- Thermal rear sliding doors
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Restaurants

Deli Deli

Butcher shops







CURVED GLASS SERVICE DISPLAY

REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| RH3M-38 | 115 | 9.1 | 5-15P |
| RH3M-48 | 115 | 12.3 | 5-20P |
| RH3M-57 | 115 | 13 | 5-20P |
| RH3M-76 | 115/230 | 9.8 | L14-20P |
| RH3M-96 | 115/230 | 10.3 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- 15" & 17" adjustable tempered glass shelves with integrated LED lighting
- LED lighting attached at the top of the service display
- Thermal glass rear sliding doors
- Tilt-out curved front glass
- Air circulating defogging system to keep front glass clear of condensation

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Rear fold-down work shelf | |
| Add one shelf level (with LED light strip) | |
| Eliminate 1 shelf level | |
| Mirror rear sliding doors | |
| Locks for rear sliding doors | |
| Price tag mold strip for tempered glass shelves | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas

CURVED GLASS DRY SERVICE DISPLAY

L AMBIENT



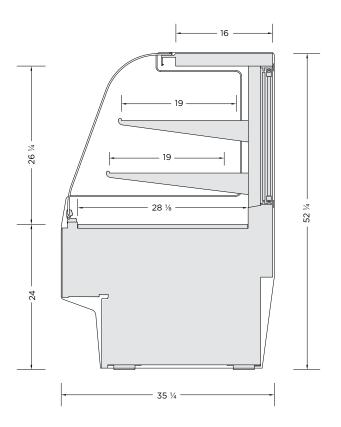

| MODEL | LENGTH |
|---------|---------|
| DH3M-38 | 40 1/4" |
| DH3M-48 | 49 %" |
| DH3M-57 | 59 ¾" |
| DH3M-76 | 78 ½" |
| DH3M-96 | 97 %" |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- 15" & 17" adjustable tempered glass shelves with integrated LED lighting
- Tilt-out curved front glass for easy cleaning
- LED lighting attached to the top ledge of the display
- Rear sliding doors
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Restaurants



Deli

Butcher shops



Cafe





CURVED GLASS DRY SERVICE DISPLAY

___ AMBIENT

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|-------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| DH3M-38 | 115 | .5 | 5-15P |
| DH3M-48 | 115 | .5 | 5-15P |
| DH3M-57 | 115 | 1.0 | 5-15P |
| DH3M-76 | 115 | 1.0 | 5-15P |
| DH3M-96 | 115 | 1.0 | 5-15P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- 15" & 17" adjustable tempered glass shelves with integrated LED lighting
- LED lighting attached at the top of the service display
- Glass rear sliding doors
- Tilt-out curved front glass

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to Veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Rear fold-down work shelf | |
| Add 1 shelf level (with LED light strip) | |
| Eliminate 1 shelf level | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Price tag mold strip for tempered glass shelves | |

- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty

SQUARE GLASS SERVICE DISPLAY

₽ REFRIGERATED



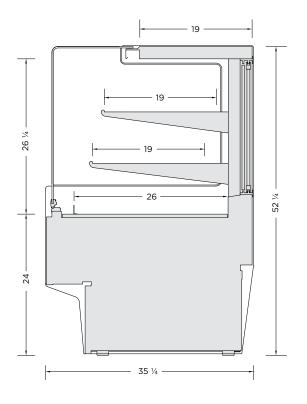

| MODEL | LENGTH |
|-----------|---------|
| SG-RH3-38 | 40 1/4" |
| SG-RH3-48 | 49 1/8" |
| SG-RH3-57 | 59 ¾" |
| SG-RH3-76 | 78 ½" |
| SG-RH3-96 | 97 %" |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- Two 19" adjustable tempered glass shelves with integrated LED lighting
- Removable base deck panels for easy cleaning and service
- Air circulating defogging system to keep the front glass clear of condensation
- LED lighting attached to the top ledge of the display
- Thermal rear sliding doors
- Exclusive one piece 90° bent front glass for better visibility and glass alignment
- · Tilt-out front glass for easy cleaning
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Bakery



Restaurants



Deli Deli



Butcher shops



Cafe





SQUARE GLASS SERVICE DISPLAY

= REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SG-RH3-38 | 115 | 9.1 | 5-15P |
| SG-RH3-48 | 115 | 12.3 | 5-20P |
| SG-RH3-57 | 115 | 13 | 5-20P |
| SG-RH3-76 | 115/230 | 9.8 | L14-20P |
| SG-RH3-96 | 115/230 | 10.3 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- Two 19" adjustable tempered glass shelves with integrated LED lighting
- LED lighting attached at the top of the service display
- Thermal glass rear sliding doors
- Tilt-out one-piece 90° square front glass
- Air circulating defogging system to keep the front glass clear of condensation

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Rear fold-down work shelf | |
| Add 1 shelf level (with LED light strip) | |
| Eliminate 1 shelf level | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Price tag mold strip for tempered glass shelves | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Rear air intake, front discharge. Avoid any obstructions in these areas

SQUARE GLASS DRY SERVICE DISPLAY

■ AMBIENT



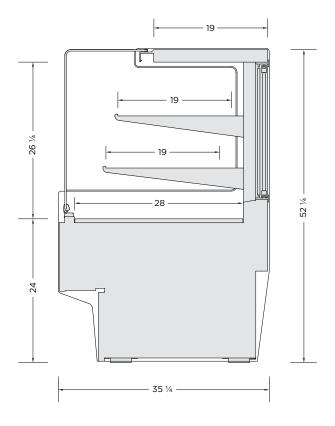

| MODEL | LENGTH |
|-----------|---------|
| SG-DH3-38 | 40 ¼" |
| SG-DH3-48 | 49 %" |
| SG-DH3-57 | 59 3/8" |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- Two 19" adjustable tempered glass shelves with integrated LED lighting
- · Tilt-out front glass for easy cleaning
- LED lighting attached to the top ledge of the display
- · Rear sliding doors
- Exclusive one piece 90° bent front glass for better presentation and alignment
- Many custom options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:



Restaurants





Butcher shops



Cafe





SQUARE GLASS DRY SERVICE DISPLAY

___ AMBIENT

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|-------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SG-DH3-38 | 115 | .5 | 5-15P |
| SG-DH3-48 | 115 | .5 | 5-15P |
| SG-DH3-57 | 115 | 1.0 | 5-15P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- Two 19" adjustable tempered glass shelves with integrated LED lighting
- LED lighting attached at the top of the service display
- Glass rear sliding doors
- Tilt-out one-piece 90° square front glass

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Mirrored interior | |
| Brushed Stainless Steel interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Rear fold-down work shelf | |
| Add 1 shelf level (with integrated LED light strip) | |
| Eliminate 1 shelf level | |
| Mirrored rear sliding doors | |
| Locks for rear sliding doors | |
| Price tag mold strip for tempered glass shelves | |

- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty

THREE-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 53"H

₽ REFRIGERATED



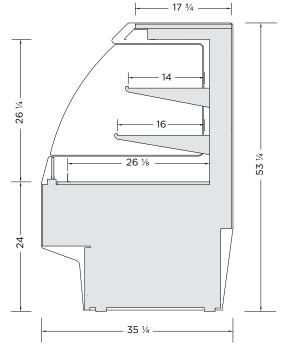

| MODEL | LENGTH | |
|------------|---------|--|
| MD3M-24-53 | 26" | |
| MD3M-38-53 | 40 1/4" | |
| MD3M-48-53 | 49 %" | |
| MD3M-57-53 | 59 ¾" | |
| MD3M-76-53 | 78 ½" | |
| MD3M-96-53 | 97 %" | |

FEATURES:

- Many exterior finish options available: powdercoat paint, brushed stainless steel, laminates and natural wood finishes
- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- Other custom options are offered. Refer to the options schedule on the next page
- · A LED light strip is mounted on the top ledge of the display area.
- 1-14" and 1-16" adjustable metal shelves with integrated LED lighting.
- The LED lighting is available in various light intensities/spectrums
- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity
- ETL electrical certification and NSF 7 standards
- New R-513A (non ozone depleting, low global warming potential) refrigerant used in the selfcontained refrigeration system
- The refrigeration system is designed to pull fresh air and heated exhaust air through a front vent integrated in the base of the display
- Remote refrigeration available. Contact Cayuga Displays for details

SUGGESTED APPLICATIONS:

Bakery

Restaurants





Butcher shops



Cafe







THREE-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 53"H

REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | | |
|---------------------------|---------|------|--------------|--|
| MODEL | VOLTS | AMPS | NEMA PLUG | |
| MD3M-24-53 | 115 | 11.7 | 5-15P | |
| MD3M-38-53 | 115 | 11.7 | 5-15P | |
| MD3M-48-53 | 115 | 11.7 | 5-15P | |
| MD3M-57-53 | 115/230 | 8.7 | L14-20P | |
| MD3M-76-53 | 115/230 | 12.4 | L14-20P | |
| MD3M-96-53 | 115/230 | 12.4 | L14-20P | |

| | | TURES: |
|--|--|--------|
| | | |

- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- · Black or white laminate exterior finish
- Solid End Panels with black or white interior finish
- A LED light strip is mounted on the top ledge of the display area
- 1-14" and 1-16" adjustable metal shelves with integrated LED lighting
- The refrigeration system is designed to pull fresh air and heated exhaust air through a front vent integrated in the base of the display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|---|--|
| Interior laminate the same as exterior | |
| Brushed stainless steel interior | |
| Mirrored interior | |
| Tempered glass end panels | |
| Mirrored glass end panels | |
| 1" black McCue impact bumper strip applied to the end panel | |
| Other McCue impact bumper strip colors available upon request | |

| MISCELLANEOUS | |
|---|--|
| Additional shelf with integrated LED lighting | |
| Tempered glass shelves with integrated LED lighting | |
| Roll-down thermal night curtain | |
| Heavy duty lockable casters | |

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75° (24°C)/55% humidity. Designed for holding pre chilled product only
- Hot gas condensate evaporation system (most units)
- ETL listed and sanitation certified to NSF 7
- 1 year parts and labor warranty

THREE-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 53"H

Standard features shown

MD3M-24-53

Custom option shown



Finishes: Powdercoat, Textured Black



Finishes: Laminate, Brazilwood (7946)

MD3M-38-53



Finishes: Powdercoat, Textured Black



Laminate, Soft Gold Mesh (4911)

MD3M-48-53



Finishes: Powdercoat, Textured Black





THREE-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 53"H

Standard features shown

MD3M-57-53


Custom option shown



Finishes: Powdercoat, Textured Black




MD3M-76-53

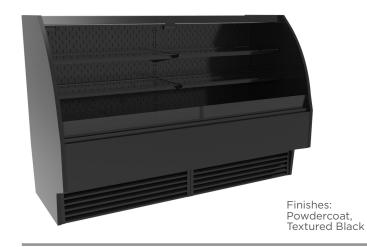



MD3M-96-53

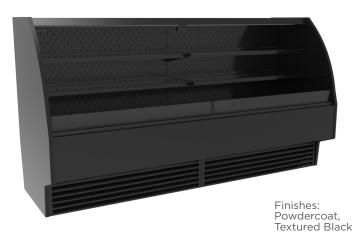






FOUR-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 63"H

₽ REFRIGERATED

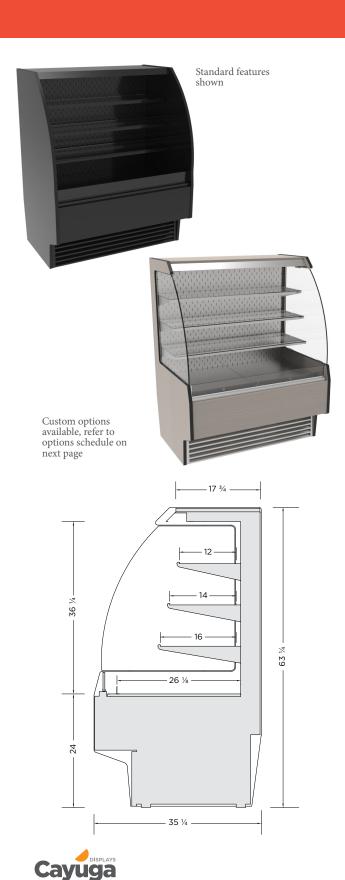

| MODEL | LENGTH |
|------------|--------|
| MD4M-24-63 | 26" |
| MD4M-38-63 | 40 ¼" |
| MD4M-48-63 | 49 %" |
| MD4M-57-63 | 59 ¾" |
| MD4M-76-63 | 78 ½" |
| MD4M-96-63 | 97 %" |

FEATURES:

- Many exterior finish options available: powdercoat paint, brushed stainless steel, laminates and natural wood finishes
- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- Other custom options are offered. Refer to the options schedule on the next page
- A LED light strip is mounted on the top ledge of the display area.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated LED lighting.
- The LED lighting is available in various light intensities/spectrums
- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity
- ETL electrical certification and NSF 7 standards
- New R-513A (non ozone depleting, low global warming potential) refrigerant used in the selfcontained refrigeration system
- The refrigeration system is designed to pull fresh air and heated exhaust air through a front vent integrated in the base of the display
- Remote refrigeration available. Contact Cayuga Displays for details

SUGGESTED APPLICATIONS:

₩ Bakery

Restaurants



Deli Deli



Butcher shops



Cafe



Produce



FOUR-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 63"H

REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| MD4M-24-63 | 115 | 11.7 | 5-15P |
| MD4M-38-63 | 115 | 11.7 | 5-15P |
| MD4M-48-63 | 115 | 11.7 | 5-15P |
| MD4M-57-63 | 115/230 | 8.7 | L14-20P |
| MD4M-76-63 | 115/230 | 12.4 | L14-20P |
| MD4M-96-63 | 115/230 | 12.4 | L14-20P |

| CT/ | \ KIC | ١лп | | | THE | PES: |
|-----|-------|-----|------------|-------|-----|------|
| 316 | A INL | /AR | $_{\rm L}$ | · E A | LUB | rea. |

- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- · Black or white laminate exterior finish
- Solid End Panels with black or white interior finish
- A LED light strip is mounted on the top ledge of the display area
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated LED lighting
- The refrigeration system is designed to pull fresh air and heated exhaust air through a front vent integrated in the base of the display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|---|--|
| Interior laminate the same as exterior | |
| Brushed stainless steel interior | |
| Mirrored interior | |
| Tempered glass end panels | |
| Mirrored glass end panels | |
| 1" black McCue impact bumper strip applied to the end panel | |
| Other McCue impact bumper strip colors available upon request | |

| MISCELLANEOUS | |
|---|--|
| Additional shelf with integrated LED lighting | |
| Tempered glass shelves with integrated LED lighting | |
| Roll-down thermal night curtain | |
| Heavy duty lockable casters | |

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75° (24°C)/55% humidity. Designed for holding pre chilled product only
- Hot gas condensate evaporation system (most units)
- ETL listed and sanitation certified to NSF 7
- 1 year parts and labor warranty

FOUR-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 63"H

Standard features shown

MD4M-24-63

Custom option shown



Finishes: Powdercoat, Textured Black



Finishes: Laminate, Brazilwood (7946)

MD4M-38-63



Finishes: Powdercoat, Textured Black



Finishes: Laminate, Soft Gold Mesh (4911)

MD4M-48-63



Finishes: Powdercoat, Textured Black



Finishes: Laminate, Windswept Bronze (4795)

FOUR-LEVEL UPRIGHT SELF-SERVICE DISPLAY - 63"H

Standard features shown

MD4M-57-63

Custom option shown




Finishes: Powdercoat, Textured Black




MD4M-76-63



Finishes: Powdercoat, Textured Black



MD4M-96-63

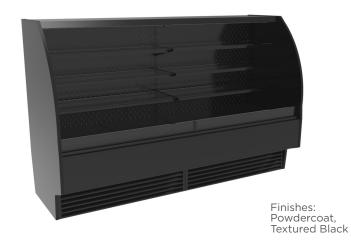






UPRIGHT THREE-LEVEL SELF-SERVICE DISPLAY

₽ REFRIGERATED



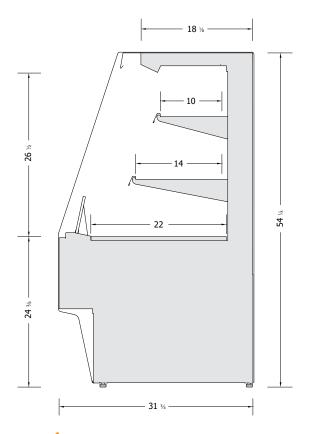

| MODEL | LENGTH |
|-----------|---------|
| GP3-38-54 | 40 1/4" |
| GP3-48-54 | 49 1/8" |
| GP3-57-54 | 59 ¾" |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- · LED lighting attached to the top ledge of the display
- 10" & 14" adjustable metal shelves with integrated LED lighting and raised front lip to attach price tag mold
- Removable base deck panels for easy cleaning and service
- Many options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Restaurants

Deli Deli

Butcher shops



Cafe

Produce



UPRIGHT THREE-LEVEL SELF-SERVICE DISPLAY



| ELECTRICAL SPECIFICATIONS | | | | |
|---------------------------|---------|------|--------------|--|
| MODEL | VOLTS | AMPS | NEMA PLUG | |
| GP3-38-54 | 115 | 12.3 | 5-20P | |
| GP3-48-54 | 115/230 | 8.7 | L14-20P | |
| GP3-57-54 | 115/230 | 8.9 | L14-20P | |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- 10" & 14" adjustable metal shelves with integrated LED lighting and raised front
- LED lighting attached at the top of the service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Interior laminate the same as exterior | |
| Brushed Stainless Steel interior | |
| Mirrored interior | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Price tag mold strip for shelves | |
| Add 1 shelf level (with integrated LED light strip) | |
| Eliminate 1 shelf level | |
| Rear venting kit for wall installation | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% Humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Front air intake, rear discharge. Avoid any obstructions in these areas. Allow 4" minimum clearance.

UPRIGHT FOUR-LEVEL SELF-SERVICE DISPLAY

REFRIGERATED



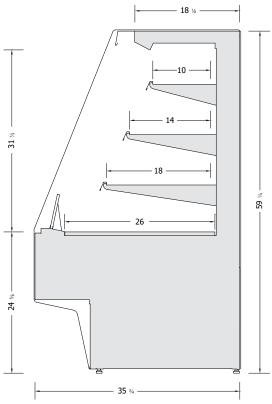

| MODEL | LENGTH |
|-----------|---------|
| GP4-38-60 | 40 1/4" |
| GP4-48-60 | 49 %" |
| GP4-57-60 | 59 ¾" |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- · Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- · LED lighting attached to the top ledge of the display
- 10", 14" & 18" adjustable metal shelves with integrated LED lighting and raised front lip to attach price tag mould
- Removable base deck panels for easy cleaning and service
- · Many options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Cafe

Restaurants

Deli Deli

Butcher shops Produce



UPRIGHT FOUR-LEVEL SELF-SERVICE DISPLAY



| ELECTRICAL SPECIFICATIONS | | | | |
|---------------------------|---------|------|--------------|--|
| MODEL | VOLTS | AMPS | NEMA PLUG | |
| GP4-38-60 | 115 | 12.3 | 5-20P | |
| GP4-48-60 | 115/230 | 8.7 | L14-20P | |
| GP4-57-60 | 115/230 | 8.9 | L14-20P | |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- 10", 14" & 18" adjustable metal shelves with integrated LED lighting and raised front
- LED lighting attached at the top of the service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Interior laminate the same as exterior | |
| Brushed Stainless Steel interior | |
| Mirrored interior | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Price tag mold strip for shelves | |
| Add 1 shelf level (with integrated LED light strip) | |
| Eliminate 1 shelf level | |
| Rear venting kit for wall installation | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% Humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Front air intake, rear discharge. Avoid any obstructions in these areas. Allow 4" minimum clearance.

UPRIGHT THREE-LEVEL SLIM-LINE SELF-SERVICE DISPLAY

₽ REFRIGERATED



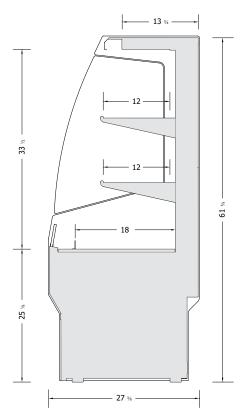

| MODEL | LENGTH |
|--------------|---------|
| SL-RSS-38-60 | 40 1/4" |
| SL-RSS-48-60 | 49 %" |
| SL-RSS-57-60 | 59 ¾" |

FEATURES:

- 3 interior finishes, textured black, white or brushed stainless steel
- Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- LED lighting attached to the top ledge of the display
- · Two adjustable metal shelves with integrated LED lighting and raised front lip to attach price tag mould
- Removable base deck panels for easy cleaning and service
- · Many options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Restaurants

Deli

Butcher shops

Cafe

Produce





UPRIGHT THREE-LEVEL SLIM-LINE SELF-SERVICE DISPLAY

= REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| SL-RSS-38-60 | 115 | 12.3 | 5-20P |
| SL-RSS-48-60 | 115/230 | 8.7 | L14-20P |
| SL-RSS-57-60 | 115/230 | 8.9 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- Black or white laminate exterior finish
- Two 12" adjustable metal shelves with integrated LED lighting and raised front lip to attach price tag molding
- LED lighting attached at the top of the service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Brushed Stainless Steel interior | |
| Mirrored interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |


| MISCELLANEOUS | |
|---|--|
| Heavy duty lockable casters | |
| Price tag mold strip for shelves | |
| Add 1 shelf level (with integrated LED light strip) | |
| Eliminate 1 shelf level | |
| Rear venting kit for wall installation | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% Humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Front air intake, rear discharge. Avoid any obstructions in these areas. Allow 4" minimum clearance.

UPRIGHT FIVE-LEVEL SELF-SERVICE DISPLAY





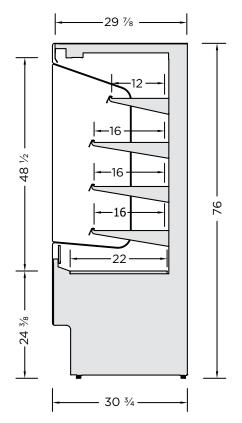

| MODEL | LENGTH |
|-----------|---------|
| RSS-38-76 | 40 ¼" |
| RSS-48-76 | 49 1/8" |
| RSS-57-76 | 59 ¾" |

FEATURES:

- · 3 interior finishes, textured black, white or brushed stainless steel
- · Many exterior colors, patterns and wood grain finishes available
- R-134A self-contained refrigeration
- LED lighting attached to the top ledge of the display
- 12" & three 16" adjustable metal shelves with integrated LED lighting and raised front lip to attach price tag mould
- Removable base deck panels for easy cleaning and service
- Many options available. Refer to the options schedule on next page

SUGGESTED APPLICATIONS:

Deli

Cafe

Restaurants

Butcher shops

Produce





UPRIGHT FIVE-LEVEL SELF-SERVICE DISPLAY

= REFRIGERATED

| ELECTRICAL SPECIFICATIONS | | | |
|---------------------------|---------|------|--------------|
| MODEL | VOLTS | AMPS | NEMA PLUG |
| RSS-38-76 | 115/230 | 8.5 | L14-20P |
| RSS-48-76 | 115/230 | 8.7 | L14-20P |
| RSS-57-76 | 115/230 | 8.9 | L14-20P |

STANDARD OPTIONS:

- Textured black, white or brushed stainless steel interior finish
- · Black or white laminate exterior finish
- 12" & three 16" tempered metal shelves with integrated LED lighting and raised front lip to attach price tag molding
- LED lighting attached at the top of the service display

CUSTOM OPTIONS:

| EXTERIOR FINISHES | |
|--|--|
| Formica laminate finish: | |
| Other laminate finish (specify): | |
| Customer laminate choices | |
| Brushed Stainless Steel | |
| Oak Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Birch/Maple Veneer Plywood | |
| - Vertical grain direction | |
| - Horizontal grain direction | |
| Clear Finish applied to veneer | |
| Stain Finish Choice | |
| 1" black McCue impact bumper strip applied to the front of the display | |
| Other McCue impact bumper strip colors Available upon request | |

| END PANELS | |
|--|--|
| Solid | |
| - LH (visualized from the front) | |
| - RH (visualized from the front) | |
| Interior laminate the same as exterior | |
| Brushed Stainless Steel interior | |
| Mirrored interior | |
| Mirrored end panel glass | |
| Stainless Steel T-mold edging | |
| 1" black McCue impact bumper strip applied to the outside of the end panel | |
| Other McCue impact bumper strip colors available upon request | |

| MISCELLANEOUS | |
|--|--|
| Price tag mold strip for shelves | |
| Add 1 shelf level (with integrated LED light strip) | |
| Eliminate 1 shelf level | |
| Tempered glass shelves instead of the standard metal shelves | |
| Top vent trim kit | |
| Roll-down security panel | |

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% Humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty
- Front air intake, rear discharge. Avoid any obstructions in these areas. A rear venting kit (for narrower width units) is available to install the display against a wall or where the back is obstructed





Formica® Laminate

Formica Group provides surfaces that fuse beautiful design with purposeful functionality. Formica* Products provide versatile surfacing solutions that are inspired by and adapt to the way people live, work and play.

Formica^{*} Brand Laminate offers a broader range of looks than ever before. Transform spaces with our modern laminates that are as beautiful as they are durable. Mix and match solids, patterns and finishes.


Product Features:

- Postforming
- Durable and Wear-resistant
- Horizontal and Vertical
- Impact Resistant

Formica® EliteForm

Our innovative Formica* EliteForm surfacing technology redefines the performance attributes of high pressure laminate to deliver a more durable laminate for today's market. Formica* Laminate with EliteForm features superior scratch resistance over other laminate brands, the ability to postform to a smaller radius with better blister resistance, and more durable, long-lasting surfaces, including the Gloss texture in horizontal applications. EliteForm comes standard on all Formica* Laminates, at no additional cost.

Price Group One: All Colours are matte (-58) finish

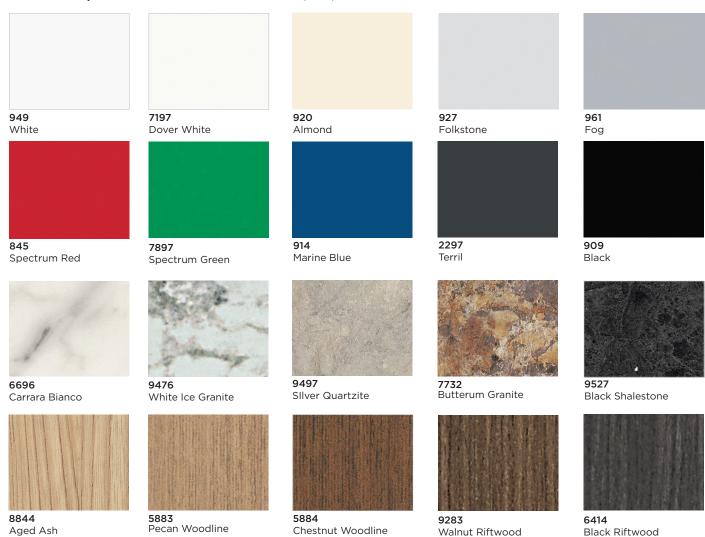

Price Group Two: All Colours are matte finish





Formica Canada Inc. is located in St-jean-sur-Richelieu, Quebec, and employs more than 250 people.

Formica Canada is proud to be part of the Well Made Here local purchasing program.

As the inventor of high pressure laminate, Formica Corporation has always worked to provide innovative, high quality products. Efficient use of resources is at our core, and we have taken many steps to improve our environmental footprint - from reusing the water in our presses to incorporating recycled materials into our surfacing products. We are committed to a long-term planning horizon that includes becoming an industry-leading environmental steward.









For larger laminate sample, please visit: cayugadisplays.com 1-800-839-5536 formica.com 1-800-FORMICA™

HOW TO ORDER

We'll help you select the right case for your requirements. The steps below will help us to serve you best.

- Choose the showcase that meets your displays requirements from the product specification sheets.
- Review the options table found on the specification sheet and make your selections of the options provided.
- Select from the large pallet of colours found on the last five pages of the brochure, or choose a stainless steel, standard black or white for the exterior finish of your showcase.
- E-mail your request for a quote to your Cayuga sales representative or sales@cayugadisplays.com and we will quickly respond to your request. Please include your full contact information in case we have any questions.

Contact the inside sales team

Cayuga Displays

E: sales@cayugadisplays.com

T: 1-800-839-5536 **F:** 1-905-772-3179



T: 800.839.5536 F: 905.772.3179
E: sales@cayugadisplays.com
A: 88 Talbot St E, PO Box 130
Cayuga, ON NOA 1E0

