

FOOD DEFROSTER AND CHILLER

ITEMS

DC:02 | GEN 2 - Defroster and Chiller
Includes DC:02 | GEN 2 unit and new HARD FILTERS



DC:02

OPTIONAL ACCESSORIES

FLAT EDGE SINK BRACKET - Mounting Bracket (optional, sold separately).
Allows unit to be used on sinks without bullnose

WALL MOUNT BRACKET - Storage Bracket (optional, sold separately)
Store DC:02 | GEN 2 when not in use.



FLAT EDGE
SINK BRACKET



WALL
MOUNT BRACKET

FEATURES

- Defrosts food using 98% less water than the running faucet method
- Defrosts food in half the time as the running faucet method
- Creates a safe and systemized approach to food defrosting
- Agitates water at a rate of nearly 133gal/minute
- Active temperature monitoring with real-time, color-coded water-temperature display for immediate operator awareness
- Maintains defrosting water temperature of 66°F or 19°C
- Designed to be easily taken apart for a deep clean and sanitization, NSF listed
- At 16 x 16 x 16", DC:02 | GEN 2 has a small footprint that will work within any commercial kitchen framework
- 8ft.(2.438m) cord and plug

DESCRIPTION

NSF listed CNSRV DC:02 | GEN 2 defrosts food using 98% less water than the running faucet method. It defrosts in less than half the time. Customers have reported saving thousands of dollars on water bills, ROI in as little as two months of usage. DC:02 | GEN 2 utilizes proprietary agitation and temperature control to ensure an even and efficient thaw while better maintaining food quality and safety.


AGENCY LISTINGS




DIMENSIONS

Shown in inches (mm)


DC:02

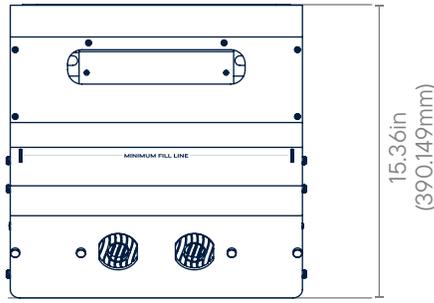

Front View

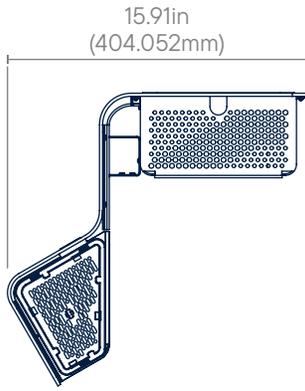


Side View

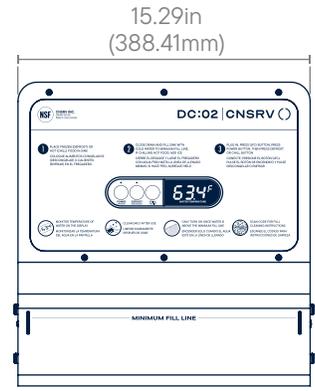

Top View


WALL MOUNT BRACKET

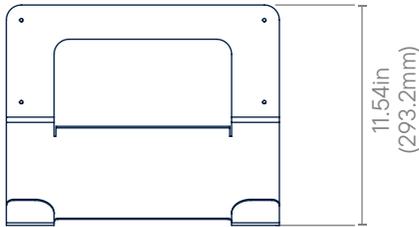

Front View




Side View

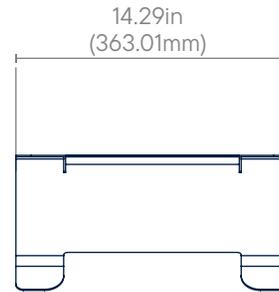


Top View


FLAT EDGE SINK BRACKET

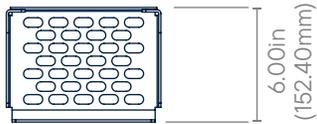

Front View



Side View



Top View

WARRANTY

The DC:02 | GEN 2 comes with CNSRV's standard warranty. For full warranty details, please refer to <https://cnsrv.com/pages/warranty>

SERVICE/SUPPORT

+1 310-853-0679
info@cnsrv.com

Due to continued product improvement, please consult www.cnsrv.com for current product specifications.

SPECIFICATIONS

ITEM	VOLTAGE	WATTS	DEFROST WATTAGE	CHILL WATTAGE	PLUG	SHIPPING SIZE W X D X H	GROSS WEIGHT	NET WEIGHT
DC:02 GEN 2	Input 120V Operates at 24V	600W Power Supply	550W	55W	NEMA 5-15P	19.7 x 19.7 x 19.7in 50 x 50 x 50cm	27.7lb 12.57 kg	22.4lb 10.17 kg



CNSRV INC.

1750 14th Street, Unit C, Santa Monica, CA 90404

+1 310 853 0679

<https://cnsrv.com>

DC:02 DISPOSABLE FILTERS

ITEMS


DC:02 Disposable Filters: Single-Use and Food-Grade

USAGE


- To use, simply attach the Disposable Filter to the Hard Filter component.
Para utilizarlo, simplemente conecte el filtro desechable al componente de filtro duro.
- Then mount the Hard Filter to the side of the DC's back cover.
A continuación monte el filtro duro en el lateral de la cubierta posterior del DC.
- See below for installation details.
Vea a continuación los detalles de instalación.

DISPOSAL


Be sure to dispose of this single-use filter after each cycle.
Asegúrese de desechar este filtro de un solo uso después de cada ciclo.

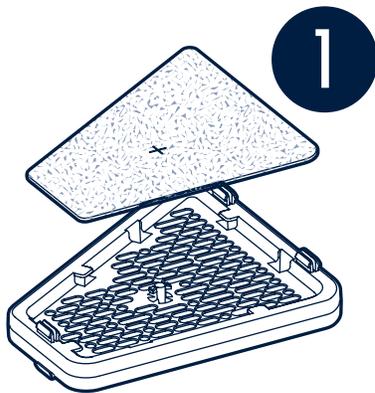


Place Disposable Filter on Hard Filter post
Coloque el filtro desechable en el poste del filtro duro

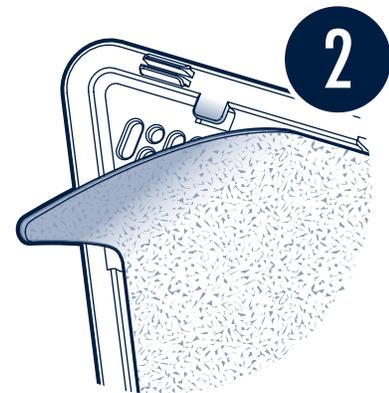

Tuck Disposable Filter under outer tabs
Coloque el filtro desechable debajo de las pestañas exteriores

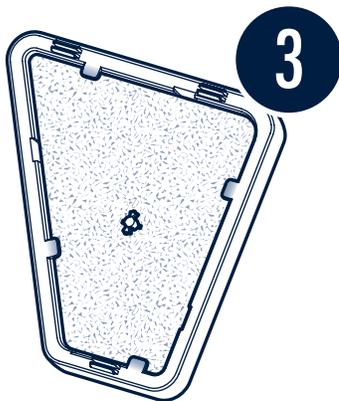

Check Filter is secure under all tabs
Comprobar que el filtro es seguro en todas las pestañas

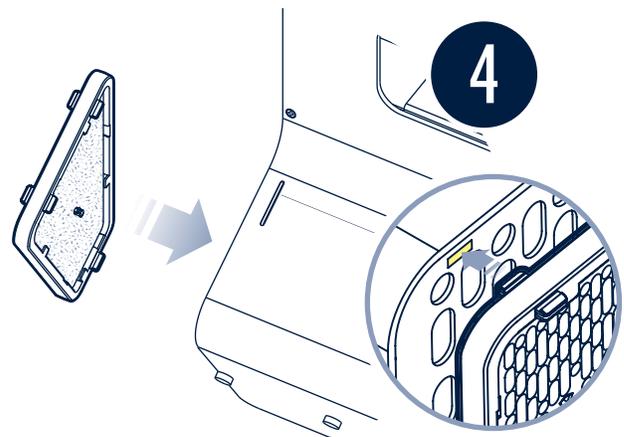

Install with Disposable Filter against DC:02 unit
Instalar con filtro desechable contra la unidad DC:02